


Hollow pin conveyor chains (ZC series) Cadenas transportadoras con pasadores huecos (Serie ZC)

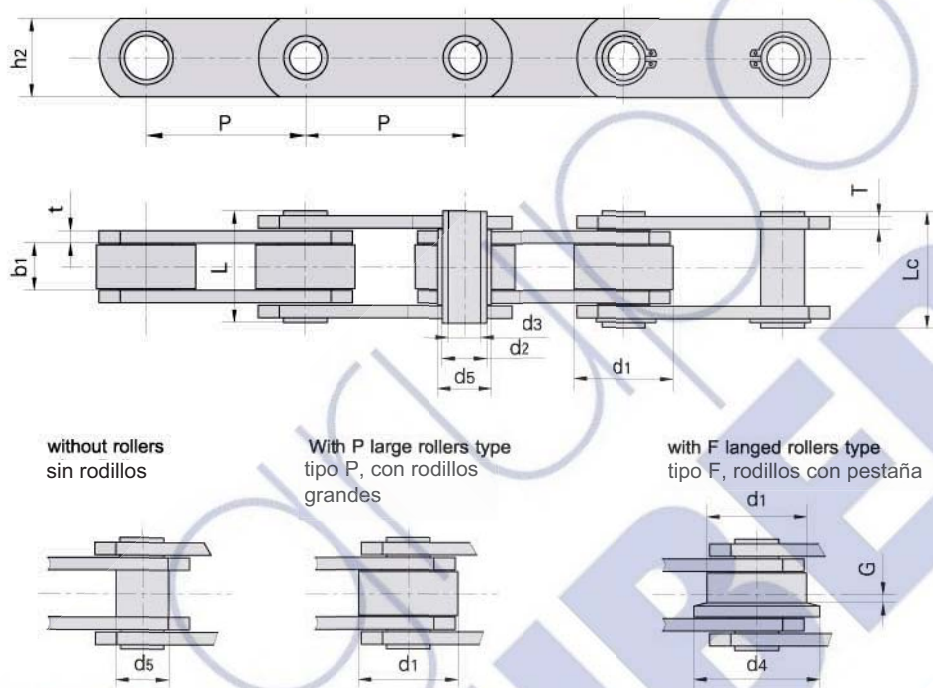

Donghua Chain No. Donghua Cadena No	Pitch							Roller dimension			Bush diameter	Plate depth
	Paso							Dimensiones rodillo			Diámetro casquillo	Altura placas
	P							d1 max	d4 max	G	d5 max	h2 max
	mm							mm	mm	mm	mm	mm
ZC21	38.1	50.8	63.5	76.2	-	-	-	25.40	-	-	11.0	18.0
ZC40	50.8	63.5	76.2	88.9	101.6	127.0	152.4	31.75	40.0	2.5	17.0	25.0
ZC60	76.2	88.9	101.6	127.0	152.4	177.8	203.2	47.50	60.0	3.5	23.0	40.0
ZC150	101.6	127.0	152.4	177.8	203.2	228.6	254.0	66.70	82.0	4.0	33.0	50.0
ZC300	152.4	177.8	203.2	254.0	304.8	-	-	88.90	114.0	8.5	38.0	60.0

Donghua Chain No. Donghua Cadena No	Width between inner plates		Pin diameter		Pin length		Plate thickness		Breaking load	
	Ancho interior		Diámetro pasador		Longitud pasador		Ancho placas		Carga de rotura	
	b1 min mm	d2 max mm	d3 min mm	L max mm	Lc max mm	t/T max mm	Q min kN/LB	*Q min kN/LB		
ZC21	12.7	9.0	6.5	26.0	27.5	2.5	21.0/4772	27.1/6159		
ZC40	15.0	14.0	10.2	36.4	37.7	4.0	40.0/9091	50.0/11362		
ZC60	19.0	19.0	13.2	45.0	46.5	5.0/4.0	60.0/13636	120.0/27270		
ZC150	26.0	26.9	20.2	58.0	60.5	7.0/5.0	150.0/34087	190.0/43177		
ZC300	38.0	32.0	22.5	83.0	85.0	10.0/8.0	300.0/68175	380.0/86362		

*Q Higher breaking load with hardened plates

*Q: Placas endurecidas, mayor carga de rotura