

CADENA FABRICADA SEGÚN NORMA ISO 9001 - ISO 14001 Y API 7F
 CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CADENA ESTIRADA / PRE-STRETCHED CHAINS



SIMPLE


ISO	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	Carga de rotura		q kg/m ≈
	mm	inch						mínimo KN	medio KN	
08B-1	12,7	1/2"	7,75	4,45	8,51	17,0	11,6	12,0	12,7	0,78
12B-1	19,05	3/4"	11,68	5,72	12,07	22,7	15,9	17,0	17,5	1,30

DOBLE

ISO	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	Carga de rotura		q kg/m ≈
	mm	inch							mínimo KN	medio KN	
08B-2	12,7	1/2"	7,75	4,45	8,51	31,0	11,6	13,92	22,0	24,4	1,55

CADENA DE RODILLOS INOX. EJE HUECO - DIN 8187 - ISO 606

CHAINS IN 304 STAINLESS STEEL WITH HOLLOW PINS - DIN 8187 - ISO 606

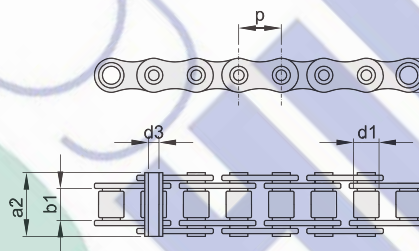

RODILLO

CADENA FABRICADA SEGÚN NORMA ISO 9001 - ISO 14001 Y API 7F
 CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CADENA ESTIRADA / PRE-STRETCHED CHAINS



ISO	p		b ₁ mm min.	d ₃ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	Carga de rotura		q kg/m ≈
	mm	inch						mínimo KN	medio KN	
08B-1	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	8,3	10,6	0,58
10B-1	15,875	5/8"	9,65	5,18	10,16	19,6	14,5	11,8	13,9	0,77
12B-1	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	12,0	17,2	0,98
16B-1	25,4	1"	17,02	8,33	15,88	36,1	20,5	20,0	36,0	2,21