


MOTORCYCLE CHAINS

MOTORRADKETTEN



Motorcycle chains Cadenas para motos

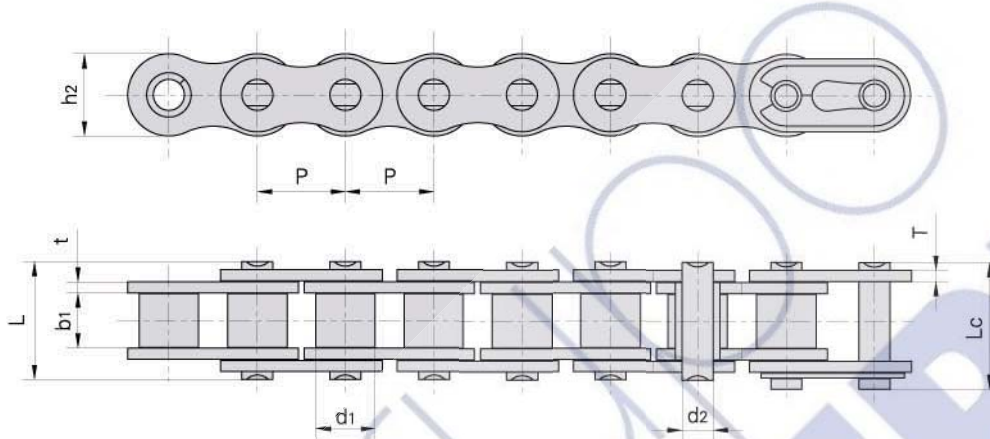

Donghua Chain No. Donghua Cadena No	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	Paso	Diámetro rodillo	Ancho interior	Diámetro pasador	Longitud pasador		Altura placas	Ancho placas	Resis. rotura	Resis. media tracción	Peso por metro
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
*25H	6.350	3.30	3.18	2.31	8.90	9.50	6.00	1.04	4.80/1091	5.5	0.17
*25H(E)	6.350	3.30	3.18	2.31	8.90	9.50	6.00	1.04	5.80/1305	6.0	0.18
*219H	7.774	4.59	5.00	3.01	11.90	12.70	7.40	1.2/1.04	6.60/1500	7.4	0.28
*270H	8.500	5.00	4.75	3.28	13.15	-	8.45	1.8/1.4	9.80/2227	11.0	0.33
*219HF1	7.785	4.60	4.50	3.28	13.00	-	7.00	2.0/1.40	9.0/2024	9.8	0.37
*T3F	9.525	6.00	9.50	4.50	18.60	-	9.30	1.85/1.50	11.80/2682	14.1	0.61
420	12.700	7.77	6.25	3.96	14.70	16.10	12.00	1.50	16.00/3636	18.1	0.55
420F3	12.700	7.77	6.40	3.96	15.00	18.60	11.80	1.6/1.45	16.00/3636	18.1	0.64
420H	12.700	7.77	6.25	3.96	17.00	18.40	12.00	2.03	16.00/3636	18.1	0.76
428	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.0/4091	20.1	0.70
428H	12.700	8.51	7.85	4.45	18.80	19.90	11.80	2.03	20.60/4682	23.4	0.79
428F1	12.700	8.51	7.94	4.50	16.70	18.05	11.80	1.60	17.15/3858	20.1	0.71
428HSH	12.700	8.51	7.75	4.45	20.00	-	12.00	2.42	27.00/6074	29.4	0.89
428HF1	12.700	8.51	7.85	4.45	17.90	19.00	11.80	1.80	19.50/4387	20.7	0.74
428HF4	12.700	8.51	7.94	4.50	18.90	20.10	11.80	2.03	20.50/4682	23.4	0.82
428DS	12.700	8.51	7.94	4.45	17.90	19.30	12.00	1.85	18.62/4232	21.0	0.76
520	15.875	10.16	6.25	5.08	17.50	19.00	15.09	2.03	26.50/6022	29.7	0.89
520F2	15.875	10.16	6.35	5.24	17.50	19.05	15.09	2.03	26.50/6022	29.7	0.97
520F3	15.875	10.16	6.48	5.08	17.50	19.00	15.09	2.03	26.50/6022	29.7	0.89
520H	15.875	10.16	6.25	5.08	19.30	20.80	15.09	2.42	26.50/6022	31.5	1.10
525	15.875	10.16	7.95	5.08	19.30	20.70	15.09	2.03	26.50/6022	29.9	1.06
525H	15.875	10.16	7.95	5.08	20.90	22.30	15.09	2.42	26.50/6022	29.9	1.20
530	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	26.50/6022	29.7	1.06
530SH	15.875	10.16	9.40	5.08	22.10	-	15.09	2.42	32.80/7379	33.5	1.24
630	19.050	11.91	12.57	9.54	25.90	22.70	18.00	2.42	31.80/7227	41.5	1.50

*Bushing chain: d1 in the table indicate the external diameter of the bushing.

*Casquillo de la cadena: d1 en la tabla indican el diámetro exterior del casquillo.